



**EVOLUTION
WHEEL™**

EWRS-HS SERIES

WHY PEOPLE CHOOSE OUR PRODUCT

- ✓ EASY ON-SITE SERVICEABILITY
- ✓ INCREASED SAFETY AND STABILITY
- ✓ LONG WEAR LIFE
- ✓ LOW OPERATING COST/HR

EWRS-HS SERIES



BUILT BECAUSE A SEVERE DUTY CUSTOMER DEMANDS A SEVERE DUTY PRODUCT

The EWRS-HS series of non-pneumatic tires were designed to meet the needs of severe duty customers working on hard surfaces and burning through tires on a daily basis.

By creating a unique tread design that increases surface area in contact with the ground, our EWRS-HS series provides unmatched wear life on concrete and asphalt surfaces. Customers can expect a 30-40% increase in wear life over our EWRS-AT series, further reducing cost/hr and increasing their machine's ROI.

Tread pattern is one thing, but tread depth is another! To make the EWRS-HS series meet the Evolution Wheel standard we gave it the most tread depth of any hard surface tire on the market. By maintaining a 52/32nd tread depth, Evolution Wheel is raising the bar in hard surface applications.

With serviceable tire segments, the need for a service truck, specialized technicians, and press on machines is all but eliminated. We have reduced your service tooling down to only a wrench in your operator's back pocket and repair parts are readily available in your nearest onsite storage container or in the toolbox of your pickup.

Serviceable Segments for Quick and Easy In-Field Repair and a Lower Cost of Operating.


Only Service Tool Required is a Standard Wrench or Socket.

52/32nd Tread Depth; the Most of Any Hard Surface Tire on the Market.

SSAB Strenx® 700 Steel for Maximum Strength and Toughness.

Large Block Style Tread Design for Lower Ground Pressure on Hard Surfaces.

Specially Engineered Core Design to Allow for a Smooth Ride and Maximum Strength.

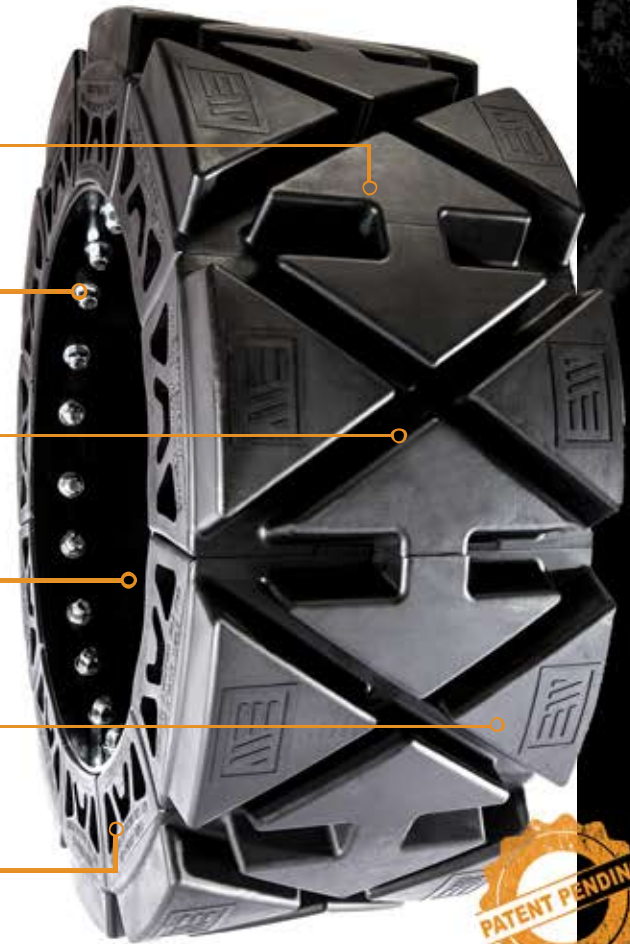

Actual Tire Dimensions

Tire Size	Actual Tire Dimensions			Wearable Tread Depth 32 nd (mm)	Weight lb (kg)	Max Load Rating lb (kg)
	Overall Diameter inch (mm)	Width inch (mm)	Rim Diameter inch (mm)			
12x16.5 (33x12-20)	32.5" (826)	12" (305)	20.5" (521)	52 (42)	240 lb (109 kg)	6,780 lb (3,075 kg)
14x17.5 (36x14-24)	36" (915)	14" (356)	24" (610)	52 (42)	380 lb (173 kg)	8,540 lb (3,874 kg)

CONTACT

CALL US

North America: (888) 249-4790
International: (204) 256-2098

WEB

evolutionwheel.com

EMAIL

info@evolutionwheel.com